

# **Connect for Industrial Transformation**

Total Solution for Automation

# Enhancing Industrial Automation Seamlessly


## Advanced Low-Voltage PoE Solutions



BROWSE PRODUCTS

### LMP-0601G-SFP-24-T-V2 Industrial Low-Voltage PoE Switch

- Low-voltage input support from 12 to 55VDC
- Simplified network deployment for engineers
- Advanced device protection with patented iPoE technology
- Perfect-fitting and powerful compact form factor for easy installation
- Industrial reliability to withstand harsh conditions

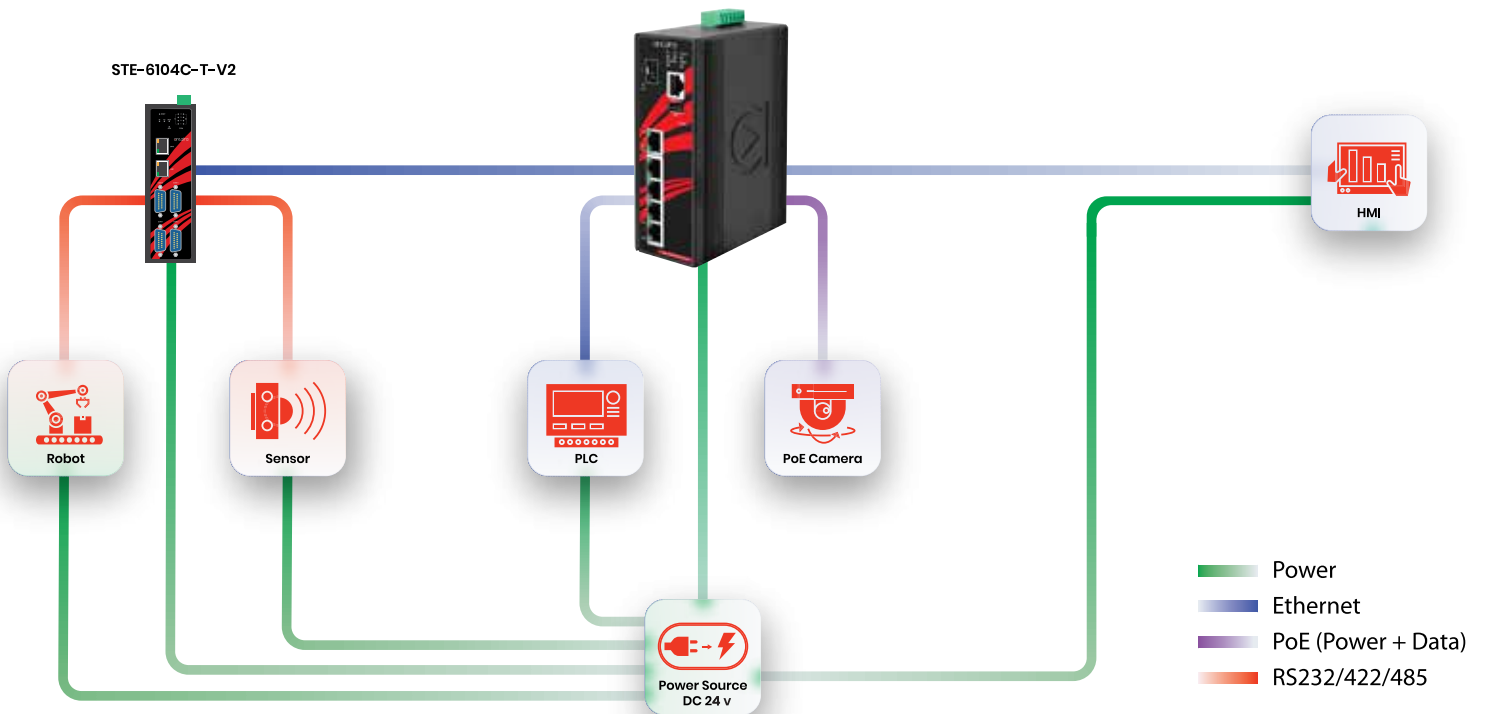

## Unmanaged Low-Voltage PoE Switches (12-55VDC)

**LNP-0500-24**

- 4 x 10/100 BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 1 x 10/100BASE-T(X) RJ45 port
- 12-55 VDC redundant power inputs

**LNP-C501G-SFP-bt-24**

- 4 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 bt PoE++ injector
- 1 x 100/1000BASE-(F)X SFP slot
- 9-55 VDC redundant power inputs

**LNP-0702G-SFP-24**

- 5 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 2 x 100/1000BASE-(F)X SFP slots
- 12-55 VDC redundant power inputs

**LNP-0800-24**

- 8 x 10/100BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 12-55 VDC redundant power inputs

**LNP-0800G-M12-67-24**

- 8 x 10/100/1000BASE-T(X) M12 ports w/ IEEE802.3 at PoE+ injector
- 8-pin X-Coded female connector
- Waterproof IP67 protection
- 12-55 VDC redundant power inputs

**LNP-1002G-SFP-24**

- 8 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 2 x 100/1000BASE-(F)X SFP slots
- 12-55 VDC redundant power inputs

## Managed Low-Voltage PoE Switches (12-55VDC)

**LMP-0600-24-V2**

- 4 x 10/100 BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 2 x 10/100 BASE-T(X) RJ45 ports
- 1 x RS232-to-RJ45 console port
- 12-55 VDC redundant power inputs
- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2

**LMP-0601G-SFP-24-V2**

- 5 x 10/100/1000BASE-T(X) (4 x IEEE 802.3at PoE+)
- 1 x 100/1000 BASE-(F)X SFP slot
- 1 x RS232-to-RJ45 console port
- 12-55 VDC redundant power inputs
- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2

## Managed Low-Voltage PoE Switches (12-55VDC)

**LMP-0702G-SFP-24-V2**


- 4 x 10/100/1000 BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 1 x 10/100/1000BASE-T(X) RJ45 port
- 2 x 100/1000BASE-(F)X SFP slots
- 1 x RS232-to-RJ45 console port
- 12-55 VDC redundant power inputs
- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2

**LMP-0800G-24**

- 8 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 1 x RS232-to-RJ45 console port
- 12-55 VDC redundant power input
- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2

**LMP-1002G-SFP-24**

- 8 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 2 x 100/1000BASE-(F)X SFP slots
- 1 x RS232-to-RJ45 serial console port
- 12-55 VDC redundant power inputs
- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2

**LMP-1204G-SFP-bt-24**

- 4 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 4 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 bt PoE++ injector
- 4 x 100/1000BASE-(F)X SFP slots
- 1 x RS232-to-RJ45 console port
- 12-55 VDC redundant power inputs
- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2

**LMP-1802G-M12-10G-SFP-67-24**

- 16 x 10/100/1000BASE-T(X) M12 ports w/ IEEE802.3 at PoE+ injector
- 8-pin X-Coded female connector
- 2 x 1G/10G SFP+ slots
- 1 x RS232-to-M12 console port
- 5-pin A-coded female connector
- Waterproof IP67 protection
- 12-55 VDC redundant power inputs
- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2



# Accelerating for Smart Manufacturing


## 10G Uplink High-Bandwidth Solutions



BROWSE PRODUCTS

### LMP-1002G-10G-SFP-24 Industrial 10G Ethernet Switch

- 10G high data transmission efficiency for large-capacity files and data
- High network deployment flexibility with both 1G/10G SFP connectivity
- Industrial reliability to withstand harsh conditions

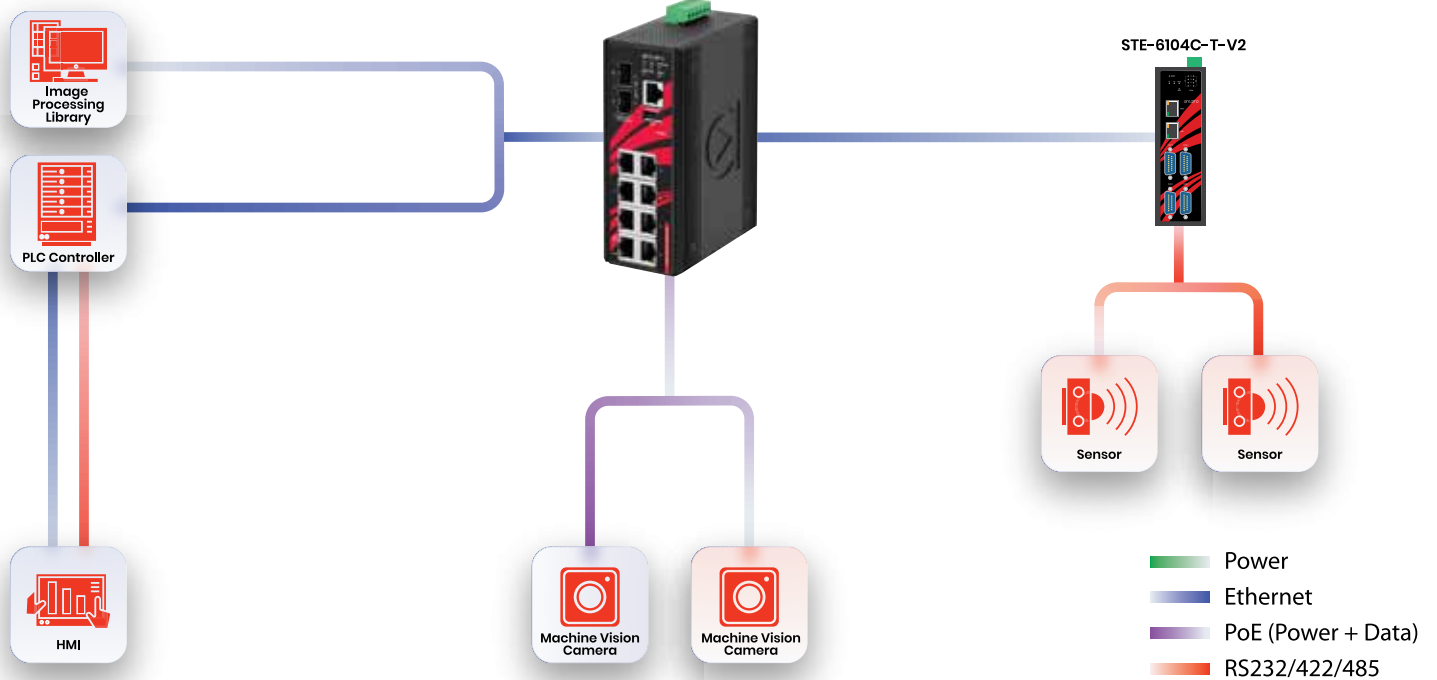

## Unmanaged 10G Ethernet Switches

**LNX-1002G-10G-SFP**

- 8 x 10/100/1000BASE-T(X) RJ45 ports
- 2 x 10G SFP+ slots
- 12-48 VDC redundant power inputs

**LNX-1204G-10G-SFP**

- 8 x 10/100/1000BASE-T(X) RJ45 ports
- 2 x 100/1000BASE-(F)X SFP slots
- 2 x 10G SFP+ slots
- 12-48 VDC redundant power inputs

**LNP-1002G-10G-SFP**

- 8 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 2 x 10G SFP+ slots
- 48-55 VDC redundant power inputs

**LNP-1204G-10G-SFP**

- 8 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 2 x 100/1000BASE-(F)X SFP slots
- 2 x 10G SFP+ slots
- 48-55 VDC redundant power inputs

## Managed 10G Ethernet Switches

**LMX-1002G-10G-SFP**

- 8 x 10/100/1000BASE-T(X) RJ45 ports
- 2 x 1G/10G SFP+ slots
- 1 x RS232-to-RJ45 console port
- 12-48 VDC redundant power inputs
- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2

**LMP-1002G-10G-SFP-24**

- 8 x 10/100/1000BASE-T(X) RJ45 ports w/ IEEE802.3 at PoE+ injector
- 2 x 1G/10G SFP+ slots
- 1 x RS232-to-RJ45 serial console port
- 12-55 VDC redundant power inputs
- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2

**LMP-1802G-M12-10G-SFP-67-24**

- 16 x 10/100/1000BASE-T(X) M12 ports, 8-pin X-Coded female connector
- 2 x 10G SFP+ slots
- 1 x RS232-to-M12 console port, 5-pin A-coded female connector
- Waterproof IP67 protection
- 24-55 VDC redundant power inputs, M12 4-pin K-coded male connector
- Switch Management Interfaces
  - Console/Telnet Command Line Interface
  - Web GUI
  - SNMP v1, v2c, and v3
  - SSHv2

# Revolutionize Your Industrial Automation

## Cutting-Edge Wireless Communication Solutions




WiFi



CYBERSECURITY



CLOUD

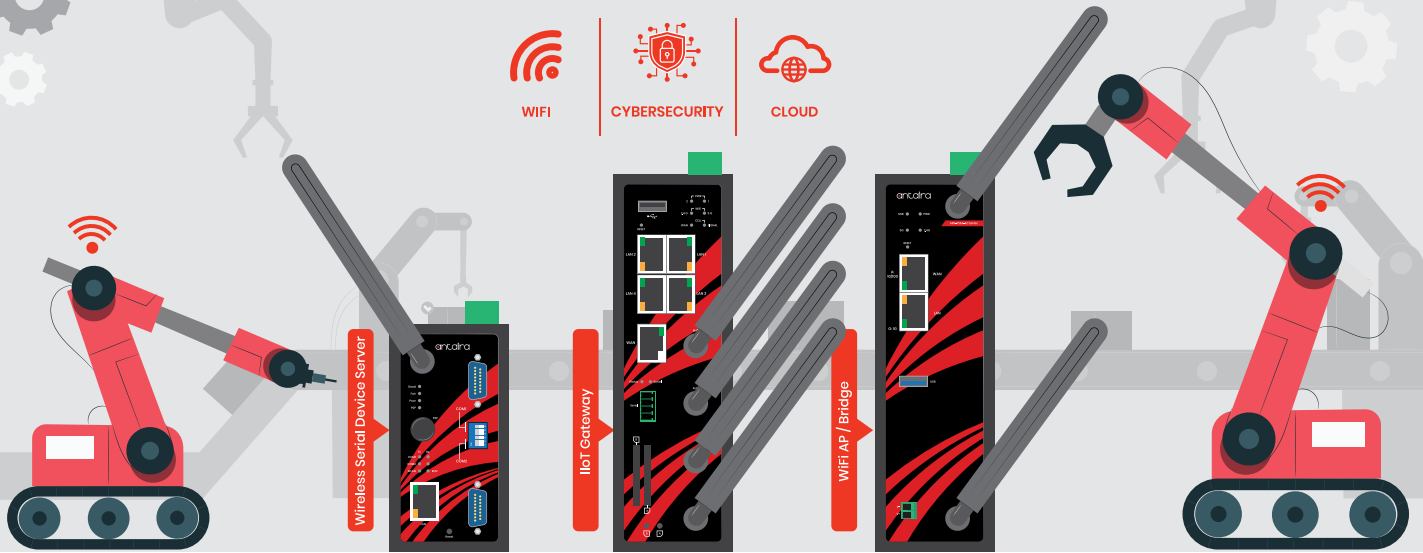

### Industrial IoT Gateways



#### AGS-7130-AC-LTE-T

- IEEE 802.11a/b/g/n/ac wireless technology
- Dual-SIM LTE module with failover function
- LTE: 800/900/1800/2100/2300/2600 MHz
- 1 x 10/100/1000BASE-T(X) WAN RJ45 port
- 4 x 10/100/1000BASE-T(X) LAN RJ45 ports
- 1 x RS-232/485 port for Modbus RTU/ASCII and serial communications
- 1 x USB 2.0 port for logging storage
- 1 x DI/DO for device triggering or event reporting
- Secure VPN technology with OpenVPN, PPTP and L2TP



#### AGS-7230-AC-T

- IEEE 802.11a/b/g/n/ac wireless technology
- 2 x 10/100/1000BASE-T(X) WAN RJ45 ports
- 4 x 10/100/1000BASE-T(X) LAN RJ45 ports
- 1 x RS-232/485 port for Modbus RTU/ASCII and serial communications
- 1 x USB 2.0 port for logging storage
- 1 x DI/DO for device triggering or event reporting
- Secure VPN technology with OpenVPN, PPTP and L2TP

### Wireless Serial Device Server



#### STW-611C

- IEEE802.11b/g/n 2.4GHz Wireless Serial Device Server
- 1 x 10/100BASE-T(X) RJ45 port
- 1 x RS-232/422/485 port for serial communication
- Supports Virtual COM, TCP/UDP Server/Client, and Tunneling Mode



#### STW-612C

- IEEE802.11b/g/n 2.4GHz Wireless Serial Device Server
- 2 x 10/100BASE-T(X) RJ45 ports
- 1 x RS-232/422/485 port for serial communication
- Supports Virtual COM, TCP/UDP Server/Client, and Tunneling Mode

### Wireless AP/Bridge



#### ARS-7235-AC

- IEEE 802.11a/b/g/n/ac 2x2 MIMO wireless technology
- Dual Band 2.4GHz/5GHz concurrent
- Access Point/Client/Bridge/Repeater/Router wireless modes
- 2 x 10/100/1000BASE-T(X) WAN RJ45 ports



#### ARX-7235-AC-PD-T

- IEEE 802.11a/b/g/n/ac 2x2 MIMO wireless technology
- 1 x 10/100/1000 BASE-T(X) WAN RJ45 port
- 1 x 10/100/1000 BASE-T(X) LAN RJ45 port, PD (Powered Device) IEEE 802.3at PoE+ Compliant
- Dual Band 2.4GHz/5GHz concurrent
- Waterproof IP67 Metal Housing



#### AMY-5133-AC-PD

- IEEE 802.11a/n/ac 2x2 MIMO wireless technology
- Access Point/Bridge/Repeater wireless modes
- 1 x 10/100/1000BASE-T(X) LAN RJ45 port
- 1 x 10/100/1000BASE-T(X) LAN RJ45 port, PD (Powered Device) IEEE 802.3at PoE+ Compliant
- Waterproof IP55 Plastic Housing

# Transforming Industrial Automation Efficiency

Solid Patent Technologies



## iPoE Budget Control

Experience automated control over safe PoE power output with intelligent power input detection.



## PRRT (PD Remote Reset Technology)

Witness remote reset capabilities breaking the distance challenge to swiftly bring your systems back online.



## Persistent PoE

Enjoy uninterrupted power supply, eliminating downtime and keeping your operations running smoothly without interruption.



## Safe PoE Disable

Take the enhanced safety measures for hassle-free maintenance or emergency situations.



## Easy-Mount-Release DIN-Rail Kit

Discover our game-changing installation technique to save you valuable time and effort during setup.



## Din-Rail Demo



Watch Now



# Compliance-Certified Solutions

Harden your industrial networks with proven reliability for specialized environments

## Vehicle




## Transportation



## Railway



## Substation



### Antaira Asia

Asia/Middle East/Africa

Tel: +886-2-2218-9733

Fax: +886-2-2218-7391

info@antaira.com.tw

### Headquarters

US/Canada/South America

Tel: +1-714-671-9000

Fax: +1-714-671-9944

info@antaira.com

### Antaira Europe

Europe

Tel: +48-22-862-88-81

Fax: +48-22-862-88-82

info@antaira.eu



Website



Contact Us