


NEMA TS2 Selection Guide



LMP-2012G-SFP-T

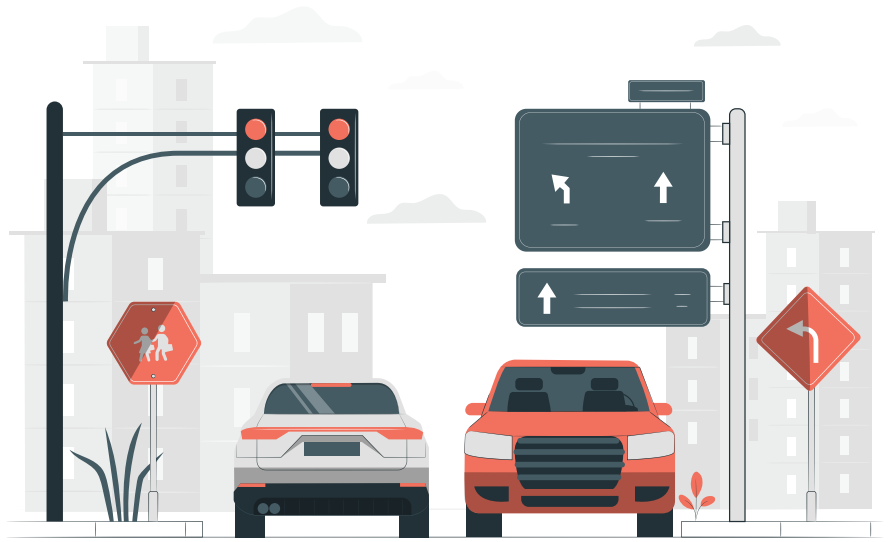

LMX-2004G-SFP-T



LMX-1600G-T



LMP-1204G-SFP-bt-24-T



LMP-1002G-SFP-24

Technical Information

Number of Ports	20	20	16	12	10
10/100Base-TX	-	-	-	-	-
10/100/1000Base-TX	8	16	16	8	8
100/1000Base-X SFP	12	4	-	4	2
IEEE 802.3at PoE (P.S.E.)	8	-	-	4	8
IEEE 802.3bt PoE (P.S.E.)	-	-	-	4	-
Jumbo Frame Support	✓	✓	✓	✓	✓

Power Requirements

Redundant Power Inputs	48V-55VDC	12V-48VDC	12V-48VDC	12V-55VDC	12V-55VDC
Overload Current Protection	✓	✓	✓	✓	✓
Reverse Polarity Protection	✓	✓	✓	✓	✓

Mechanical Characteristics

Housing	Metal, IP30 protection	Metal, IP30 protection	Metal, IP30 protection	Metal, IP30 protection	Metal, IP30 protection
Dimensions (WxHxD mm)	71.5x142x99	67x142x99	67x142x99	54x142x99	54x142x99
Din-Rail & Panel Mounting	✓	✓	✓	✓	✓

Operating Temperature

Standard (-10 to 65°C)	✓	✓	✓	✓	✓
Extended (-40 to 75°C)	✓	✓	✓	✓	✓

Standards & Certifications

EN 61000-6-4 / EN 61000-6-2	✓	✓	✓	✓	✓
FCC Part 15B / CISPR 22	✓	✓	✓	✓	✓
NEMA TS2	✓	✓	✓	✓	✓

